




## PRODUCT DATASHEET


### KBM

CaP System  
BNC MALE CONNECTOR

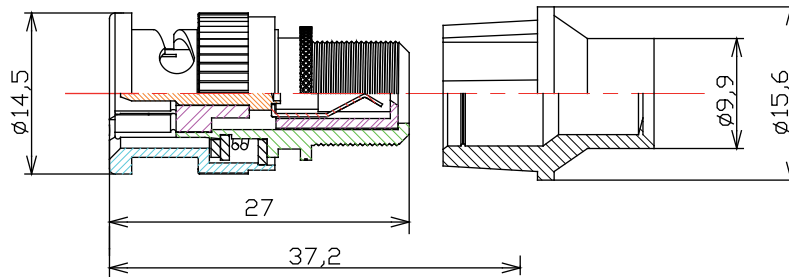


Utilize these Tools

#### Stripping Dimension:

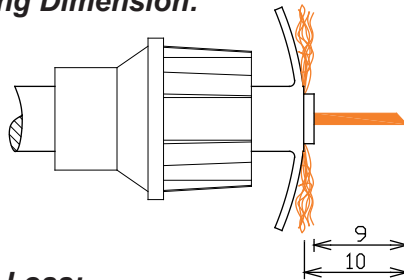

#### Return Loss:

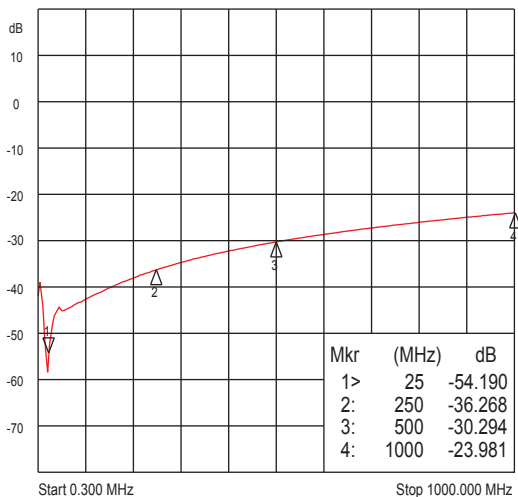

#### Suitable for Cables:

RG6, RG59, RG178, ... suitable for all cable with inner conductor from  $\varnothing$  0,3 up to  $\varnothing$  1,1 mm (from AWG 28 to AWG 18)

#### Electrical Specification

Impedance: 75 Ohm  
 Frequency: 0-1 GHz  
 Dielectric W/V: 1500 Veff  
 Insulation res: 5000 M-Ohm

#### Mechanical Specification

Body Material: Brass - Plating: Nickel  
 Center Contact: Brass - Plating: Gold  
 Shrapnel: P. Bronze - Plating: Nickel  
 Insulator: Derlin  
 Bayonet Cap: Zinc - Plating: Nickel  
 Gasket: Silicone  
 Washer: Fe - Plating: Nickel  
 Spring: SK5 - Plating: Nickel  
 Inner Retaining Ring: Fe - Plating: Nickel  
 CaP®: Protected Plastic Compound  
 Weight: 11.4 g

#### Environmental Specification

Operating Temp: - 40 ÷ + 120 °C

All measures are in millimeters